



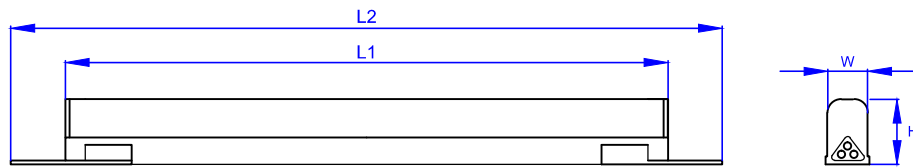

## Dimensions



Model No.	L1(mm)	L2(mm)	W(mm)	H(mm)	Flux(lm)	Ra	Input voltage
SL4-T612	865	1025	22	31	1200	>80	180-265VAC
SL4-T616	1155	1315	22	31	1600	>80	180-265VAC

## Cables

Cable	Code model	Length (m)	Cable type
	SL4-T6-2MCC	2	H05VVH2-F 3x0.75mm <sup>2</sup>
	SL4-T6-6MCC	6	
	SL4-T6-10ME	10	

## Connecting group



Max. 15 sets

## Specifications

Optics parameter	SL4-T612				SL4-T616			
	Luminous	Luminous efficacy	CRI	CCT	Luminous	Luminous efficacy	CRI	CCT
	1200lm	>90lm/W	>80	6500K	1600lm	>90lm/W	>80	6500K
Electrical parameter	Power	Input voltage	Mode		Power	Input voltage	Mode	
	12W	180-265VAC	CC		16W	180-265VAC	CC	
Physical parameter	L2	L1xWxH	Working temperature		L2	L1xWxH	Working temperature	
	1025	865x22x31	-10~60°C		1315	1155x22x31	-5°C~+45°C	

Production series	LED shaft light	Edition No.	V3.19.05
Production code	SL4-T6xx	Made by	Ken
TS No.	LK19.SL4.0100	Approved by	Susan