




## Dimensions

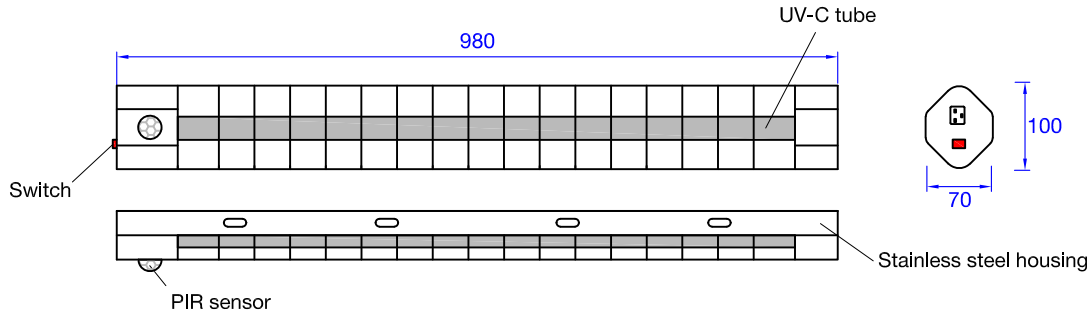

## Installation

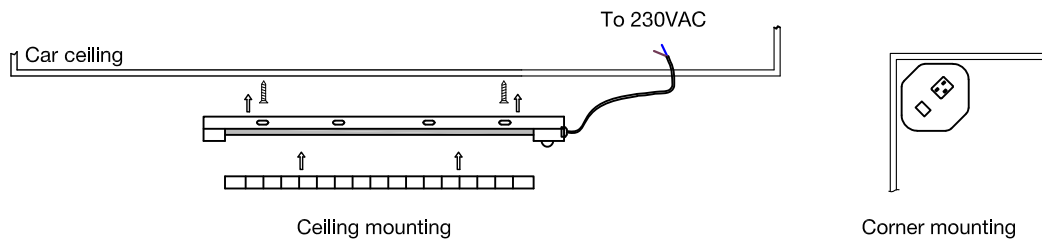

## Packaging

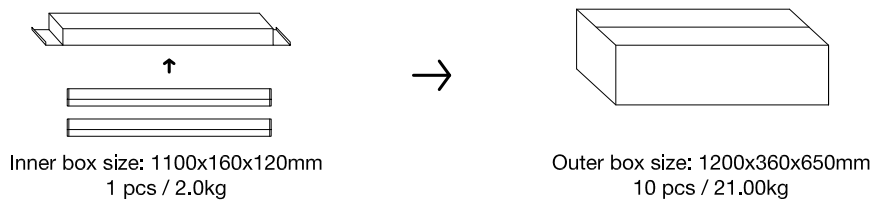

## Specifications

Input voltage	220VAC±10%, 50Hz	Wavelength	253.70nm	Continuous working time	30mins
Power	30W	UV-C tube type	Quartz, no ozone	IP rating	IP52
Sterilisation angle	180°	Sensor type	PIR	Sterilisation area	40m <sup>3</sup>
Working temp.	-10 to 35°C	Detecting distance	5m	UV-C tube lifespan	8,000 hours
Storage temp.	-20 to 60°C	Initiation	60s after cabin empties	Sensor lifespan	30,000 hours

Production series	Elevator Disinfection	Edition No.	V3.20.05
Production code	X2-XD-T30	Made by	Ken
TS No.	LK20.X1020	Approved by	Susan