



230VAC emergency power dimensions

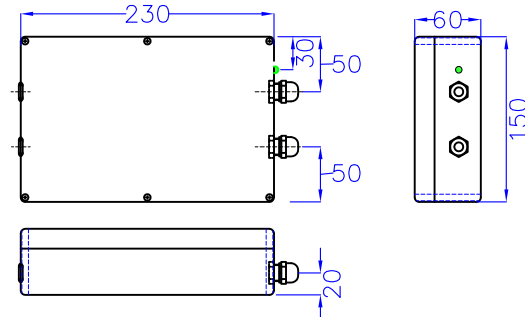

Wiring

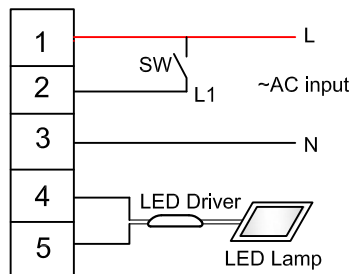

LED indicator Status:

	charging
	charging finished
	power off

Information

- 1: Please note that the LED driver can accept 230VDC and 230VAC.
- 2: Terminals 4 and 5 can accept both Normal Polarity and Reverse Polarity.

Specification

	E3-230VAC-10W	E3-230VAC-20W	E3-230VAC-40W
<b>Input</b>	220-240VAC	220-240VAC	220-240VAC
	50/60Hz	50/60Hz	50/60Hz
<b>Output</b>	230VDC	230VDC	230VDC
	10W / 90 ~ 180mins	20W / 90 ~ 180mins	40W / 90 ~ 180mins
<b>Emergency type</b>	Maintained		
<b>Comment</b>	Battery pack to be changed after 3 years		